

RAL RECESSED ARCHITECTURAL LED

IMPORTANT SAFETY INSTRUCTIONS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.


1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
2. INSTALLATION REQUIRES KNOWLEDGE OF LED LIGHTING AND ELECTRICAL SYSTEMS. RISK OF FIRE OR ELECTRICAL SHOCK EXISTS.
3. DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING KIT INSTALLATION.
4. DO NOT EXPOSE WIRING TO EDGE OF SHEET METAL OR OTHER SHARP OBJECTS IN ORDER TO PREVENT WIRING DAMAGE OR ABRASION.
5. THE LED LUMINAIRE MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND APPLICABLE LOCAL CODES.
6. PROPER GROUNDING IS REQUIRED FOR SAFETY.
7. THIS LED LUMINAIRE MUST BE INSTALLED PER THE APPLICABLE

INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT. DO NOT ATTEMPT INSTALLATION IF THIS CONDITION IS NOT MET. CONTACT A QUALIFIED ELECTRICIAN.

8. DO NOT USE THIS LUMINAIRE FOR ANYTHING OTHER THAN ITS INTENDED USE.

**9. DANGER-RISK OF
FIRE OR
ELECTRICAL
SHOCK-
DISCONNECT
POWER BEFORE
BEGINNING
INSTALLATION.**

RAL RECESSED ARCHITECTURAL LED

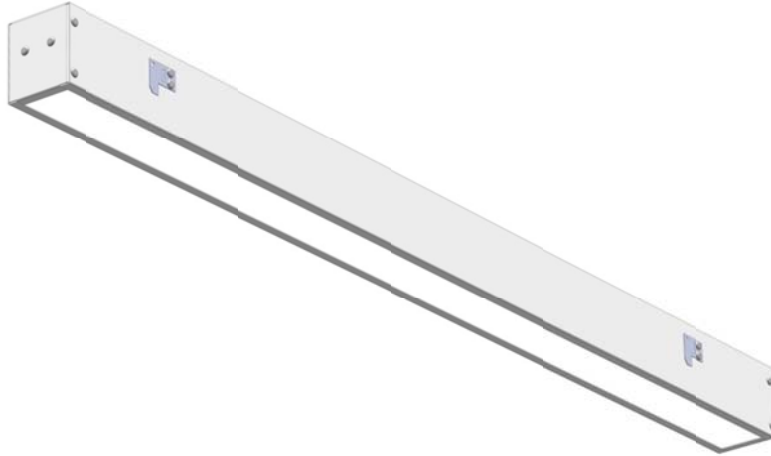


CEILING GRID INSTALLATION

Verify that the electrical power to the junction box is in the OFF position.


1. Lift fixture into grid opening and bend out earthquake clips as shown. (Fig 1)

Above ceiling view

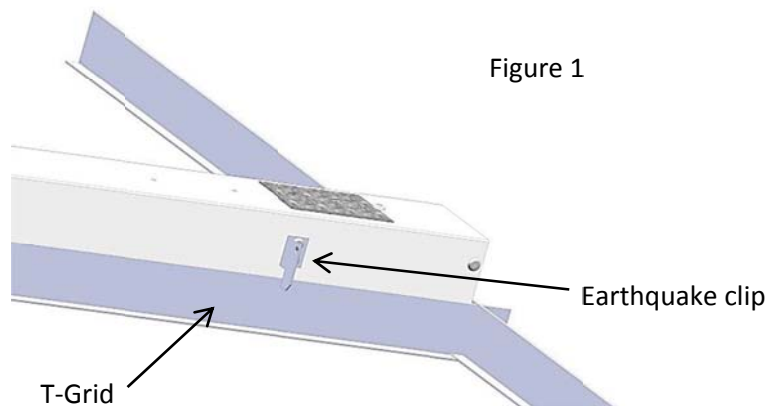


RAL RECESSED ARCHITECTURAL LED

2. Remove electrical access plate screw and remove access plate. (Fig 2)

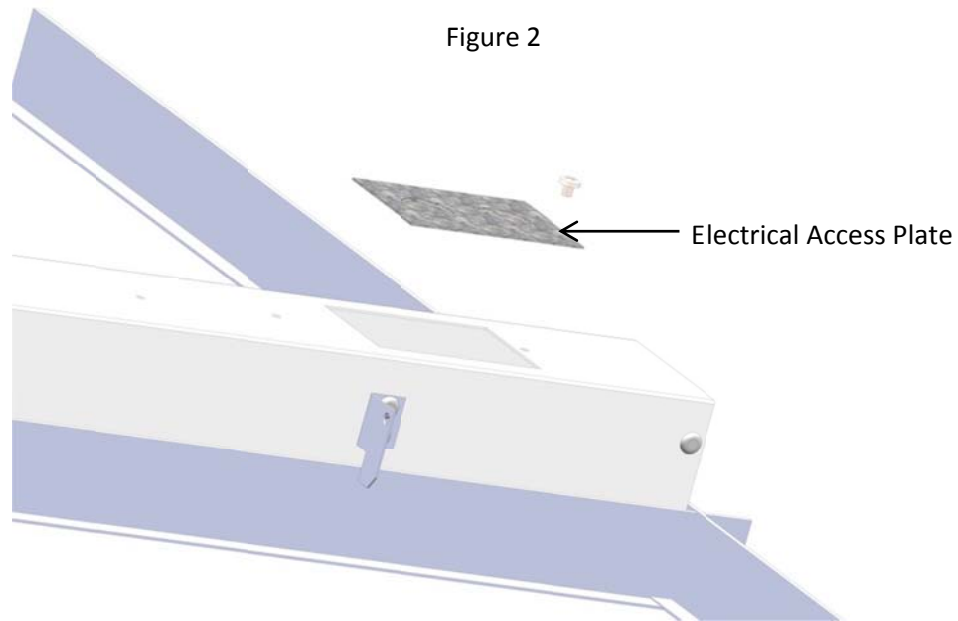


3. Remove knockout from access plate, connect power. Reinstall access plate and energize fixture.


Note: For access to LED components lift lens as shown to remove. (Fig 3)

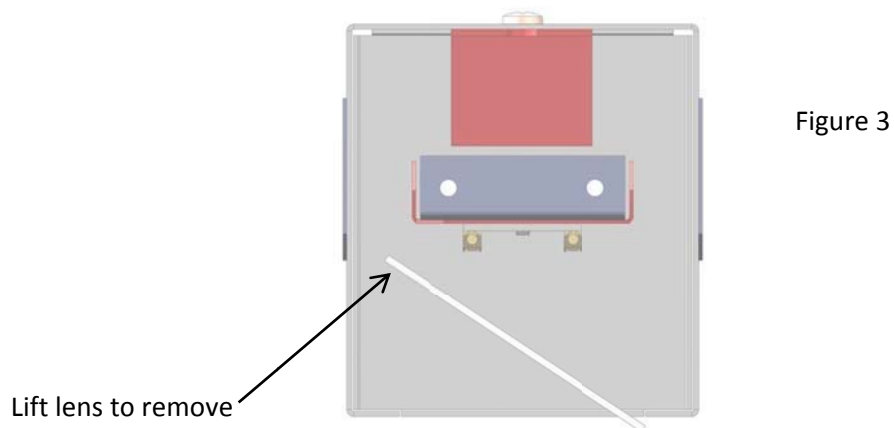

HARD CEILING INSTALLATION

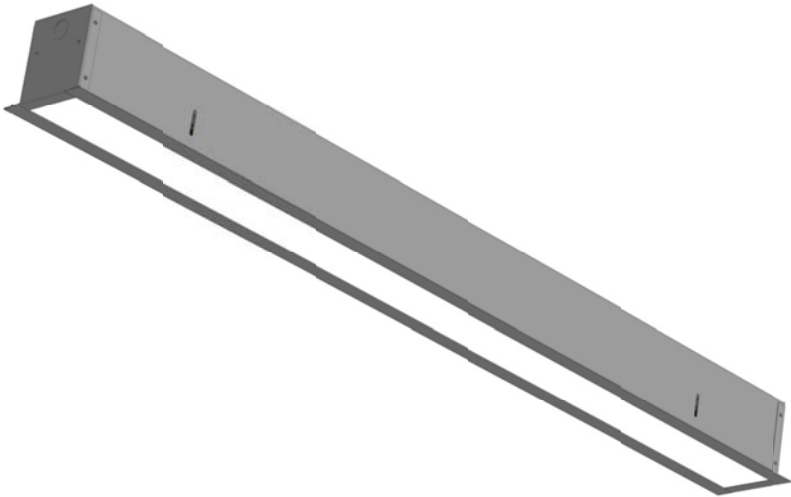


-
1. Remove lens. (Fig 4)

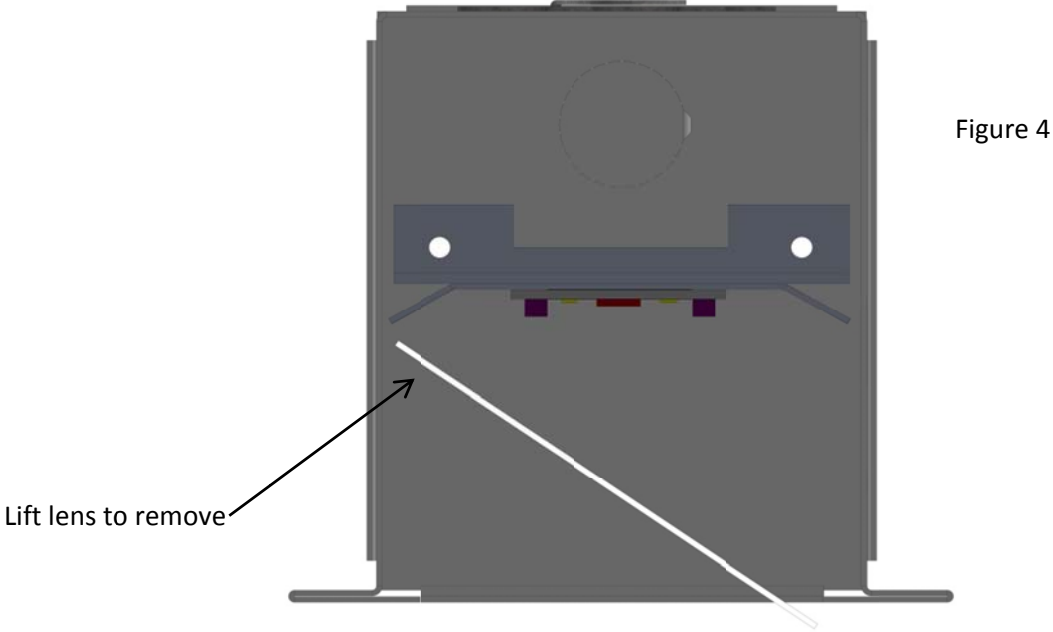


2. Remove access plate screw and access plate. Connect supply power. Reinstall access plate. (Fig 5)

RAL RECESSED ARCHITECTURAL LED

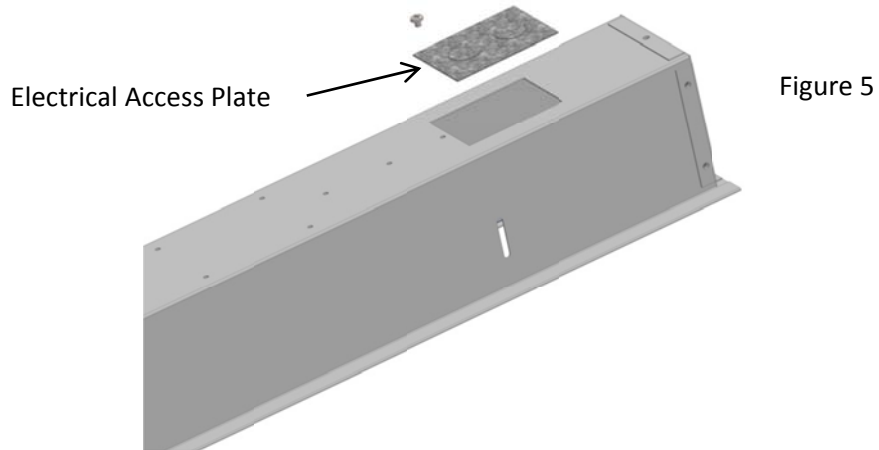

3. Lift fixture into ceiling opening and secure with framing screws (not included) in 4 places. (Fig 6)

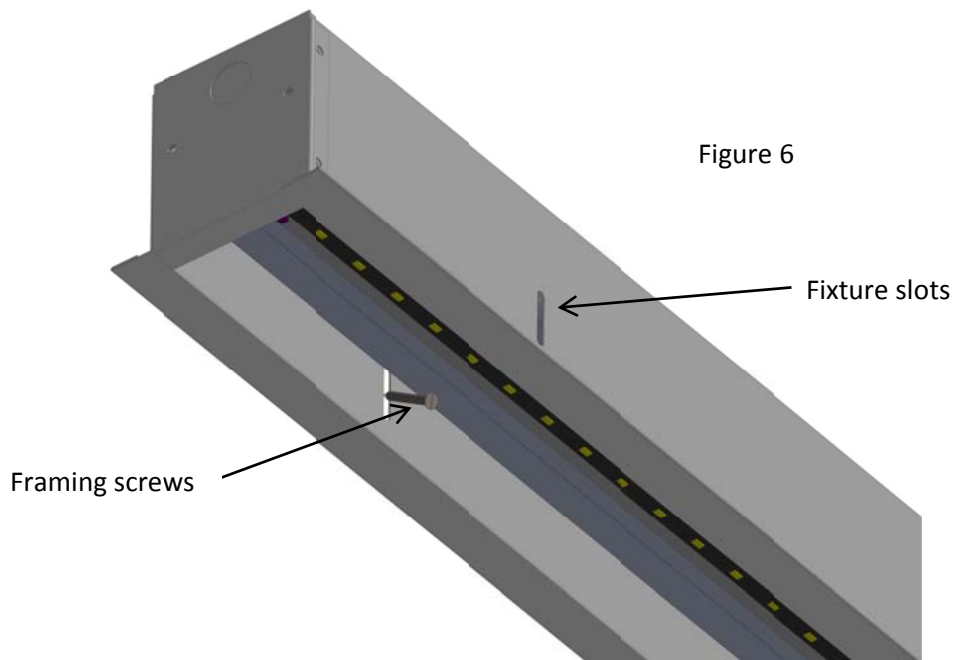

4. Reinstall lens, energize power.

WIRING

Universal driver: 120VAC - 277VAC, 50/60HZ.

1. Verify that the electrical power to the Luminaire is in the OFF position.
2. NOTE - When used in a pendant mount or chain hung application stranded wire shall be used from the supplied disconnect to the point where it connects to the branch circuit.
3. Connect the fixture side Black lead to Line supply lead
4. Connect the fixture side White lead to Neutral supply lead.
5. Connect the fixture side Green lead to Green supply lead.
6. Energize the electrical power and verify proper operation.

Wiring Diagram

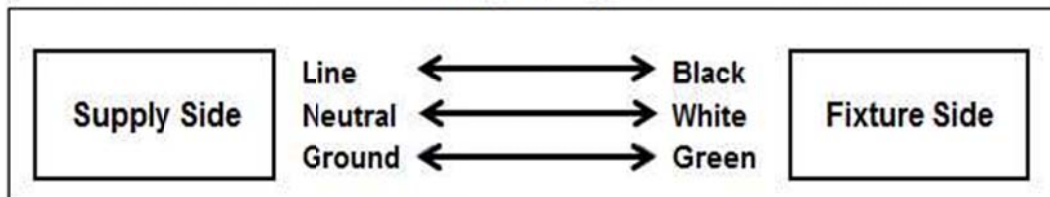


Figure 10