

IMPORTANT SAFEGUARDS

INSTRUCTIONS

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.

- 1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.**
- 2. DISCONNECT POWER PRIOR TO COMMENCING WORK.**
- 3. INSTALLATION REQUIRES KNOWLEDGE OF LED LIGHTING AND ELECTRICAL SYSTEMS. RISK OF FIRE OR ELECTRICAL SHOCK EXISTS.**
- 4. DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING INSTALLATION**
- 5. DO NOT EXPOSE WIRING TO EDGE OF SHEET METAL OR OTHER SHARP OBJECTS IN ORDER TO PREVENT WIRING DAMAGE OR ABRASION.**
- 6. THE LED LUMINAIRE MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES.**
- 7. PROPER GROUNDING IS REQUIRED FOR SAFETY.**
- 8. THIS LED LUMINAIRE MUST BE INSTALLED PER THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT. DO NOT ATTEMPT INSTALLATION IF THIS CONDITION IS NOT MET. CONTACT A QUALIFIED ELECTRICIAN.**
- 9. DO NOT USE THIS LUMINAIRE FOR ANYTHING OTHER THAN ITS INTENDED USE.**

INSTALLATION

WARNING: To avoid fire, shock, or death; **TURN OFF POWER** at circuit breaker or fuse and test that power is off before wiring!

THIS FIXTURE IS INTENDED FOR CEILING MOUNT, WALL MOUNT.

1. Remove the LED tray mount by spreading open the sides of channel releasing the tabs from the channel slots.
2. Remove the appropriate knockouts (back or end) for electrical access.
3. Secure the fixture in the desired location by suitable means.
4. Connect wires as shown in wiring diagram (see Figure 2 below).

5. Reinstall the LED module tray back into the channel slots.
6. Turn on power and check for proper operation.

Luminaire Dimensional Data

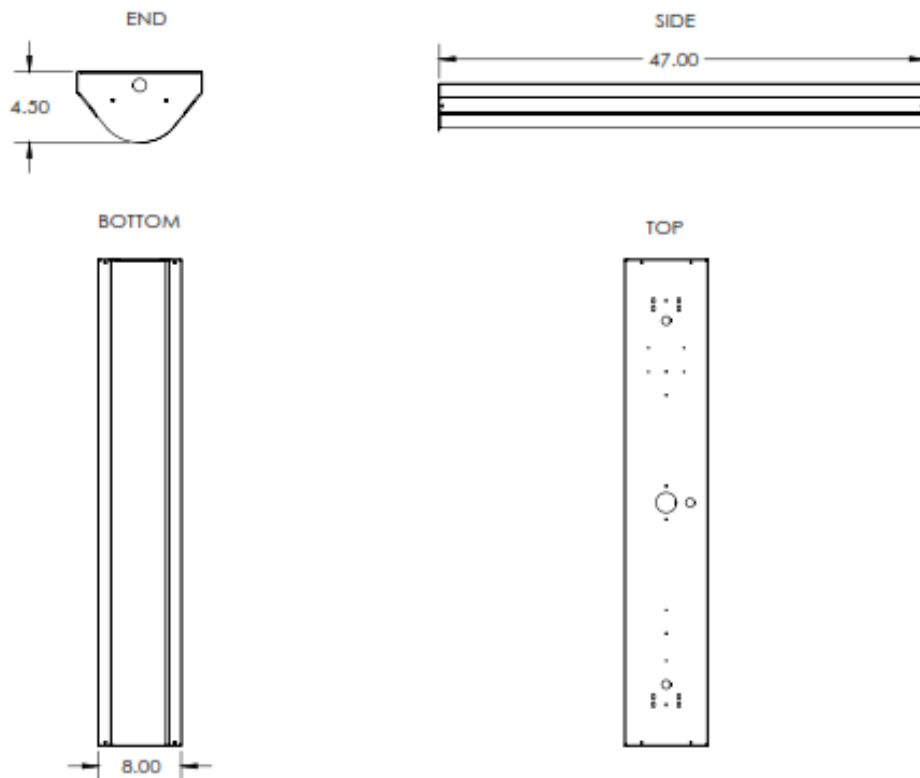


Figure 1

Wiring

Universal driver: 120VAC - 277VAC, 50/60HZ.

1. Verify that the electrical power to the Luminaire is in the OFF position.
2. Connect the driver black lead to Line supply lead. (see Fig. 2)
3. Connect the driver white lead to Neutral supply lead.
4. Connect the ground wire to fixture ground.
5. Energize the electrical power and verify for proper operation.

Wiring Diagram

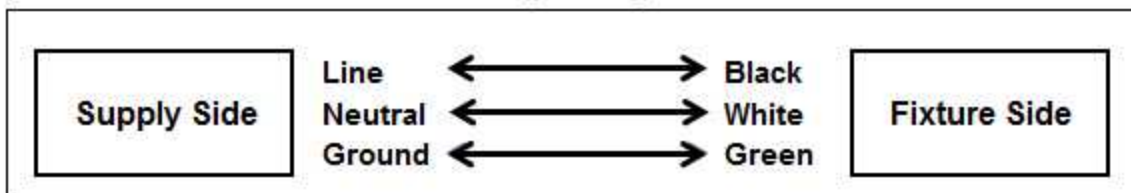


Figure 2