


Project Name	Date
Catalog #	Type

# VIENTO HOUSE SIDE SHIELD

## OPTICS ACCESSORY

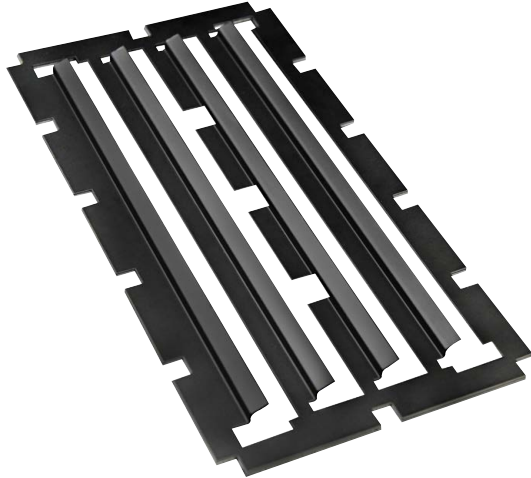

### FEATURES

- Significantly reduces backlight to minimize light trespass.
- Available for Type II Medium (2M), Type II Short (2S), Type III Medium (3M) and Type IV Short (4S) optics, both NORMAL and rotated LEFT/RIGHT.
- Factory installed as an option when ordered with the luminaire.
- Field installable (tool-free) when ordered as a separate accessory.

### CONSTRUCTION

- Low-profile, precision fabricated CNC design.
- Flat black TGIC-polyester powder coat finish using tightly controlled multi-stage process to a uniform 3 mil thickness (min).
- Finish provides superior protection from corrosion and maximum environmental durability.
- Dimensions: 11.38" L x 6.13" W x 0.4" H
- Weight: 0.45 lbs

## IES DISTRIBUTION TYPES





**ISO Lines** Distance in Units of Mounting Height Values Based on 25 Foot Mounting Height

Type II Short+ HSS

Type II Medium + HSS

Type III Medium + HSS

Type IV Short + HSS



## ORDER LOGIC

VNT	-	HSS	-	-	-	
	<b>ACCESSORY</b>		<b>OPTICS</b>		<b>SIZE</b>	
	HSS	House Side Shield	N	Normal	SM	Small
			LR	Rotated Optics	MED	Medium
					LRG	Large



Medium Viento Shown With House Side Shield



# VIENTO HOUSE SIDE SHIELD

## OPTICS ACCESSORY

### PHOTOMETRIC DATA

5000K CCT					
Model	Type II Medium + HSS				
	IES Report	BUG Rating	Lumens	System Watts	Lm/W
100	ATAL027232	B1-U0-G2	6939	109.1	63.6
200	ATAL019152	B1-U0-G3	15134	218.5	69.3
300	ATAL020019	B2-U0-G4	22862	323.4	70.7

Model	Type II Short + HSS				
	IES Report	BUG Rating	Lumens	System Watts	Lm/W
100	ATAL027231	B1-U0-G2	7025	109.0	64.4
200	ATAL019151	B1-U0-G2	14671	218.5	67.1
300	ATAL020018	B1-U0-G3	22070	323.3	68.3

Model	Type III Medium + HSS				
	IES Report	BUG Rating	Lumens	System Watts	Lm/W
100	ATAL027079	B1-U0-G2	7206	109.1	66.0
200	ATAL019153	B1-U0-G3	15557	218.4	68.7
300	ATAL020020	B1-U0-G4	23370	323.7	72.2

Model	Type IV Short + HSS				
	IES Report	BUG Rating	Lumens	System Watts	Lm/W
100	ATAL027230	B1-U0-G2	6899	109.0	63.3
200	ATAL01954	B1-U0-G3	15013	218.3	68.8
300	ATAL020021	B1-U0-G4	22456	323.6	69.4




Medium Viento Shown With House Side Shield

### Rotated Asymmetric Optics (Type II, Type III & Type IV)

Normal (3MN)

Top View

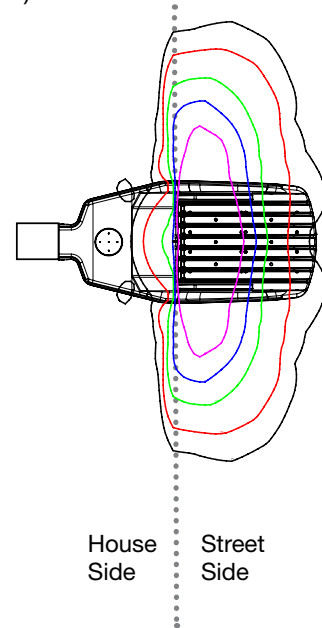

90° Left (3ML)

Top View



90° Right (3MR)

Top View

