


Project Name	Type
--------------	------

Catalog #

RHB QUICKPENDANT MOUNTING SYSTEM

RHB QUICK HANG ACCESSORY

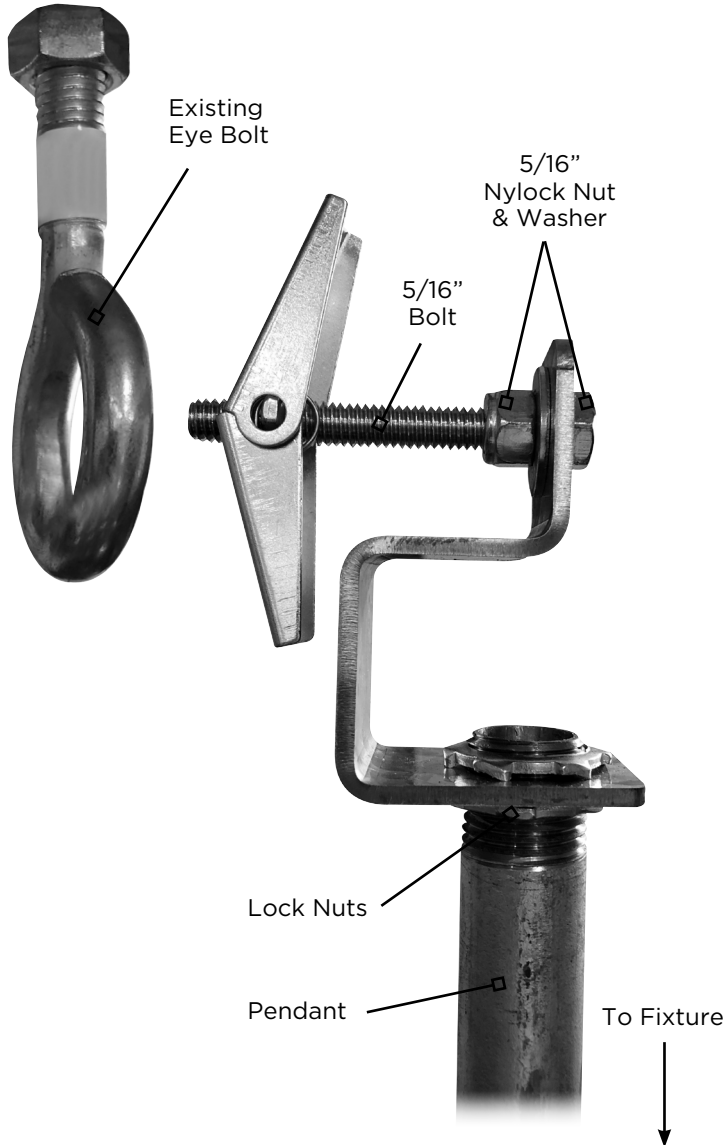

FEATURES

- Auto-leveling, one-handed installation for existing eye bolts.
- Only portable, rigid pendant mounting system.
- Quick and efficient installation in the field in comparison to using traditional jack chain or cable.
- Power cord can be hidden inside the pendant provides a simple, clean look for retail and commercial applications.
- Wiring trough prevents the power cord from being pinched by the toggle bolt.
- 2 sizes available - For 1/2" NPT and 3/4" NPT pendant drops.
- Toggle fits in 7/8" diameter - 2 7/8" diameter eyebolt openings.

CONSTRUCTION

- Made from 11 gauge steel.
- Electrostatically applied black powder coat. For custom colors please consult factory.

INSTALLATION INSTRUCTIONS

1. Place the fixture down on the ground on a soft surface.
2. Thread one conduit locknut onto the pipe. Place the steel bracket on top of the locknut. Thread a second locknut onto the pipe and tighten securely.
3. Pull line voltage wires up through the pendant drop. Thread opposite end of the pendant drop into the fixture hub or through the pendant mounting hole as described by the fixture manufacturer.
4. Unscrew toggle out to the end of the 5/16" bolt. Lift the fixture with the pendant drop attached to the eyebolt and press toggle into the opening of the eyebolt.
5. Hand tighten toggle by threading it toward the steel bracket.
6. Using a 1/2" socket, tighten toggle bolt securely, but don't overtighten.
7. Wire the fixture to the junction box.

ORDER LOGIC

RHB -

SIZE

- AP12 1/2" NPT
AP34 3/4" NPT

