

---

## **IMPORTANT SAFETY INSTRUCTIONS**

---

### **INSTRUCTIONS**

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.**

---

**CAUTION – Risk of fire or electrical shock. DISCONNECT POWER before beginning installation.**


1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
2. SAVE THESE INSTRUCTIONS.
3. DO NOT USE OUTDOORS.
4. DO NOT MOUNT NEAR GAS OR ELECTRIC HEATERS.
5. USE CAUTION WHEN SERVICING BATTERIES.
6. DO NOT USE THIS EQUIPMENT FOR OTHER THAN INTENDED USE.
7. DISCONNECT POWER PRIOR TO COMMENCING WORK.
8. INSTALLATION REQUIRES KNOWLEDGE OF LED LIGHTING AND ELECTRICAL SYSTEMS. RISK OF FIRE OR ELECTRICAL SHOCK EXISTS.
9. DO NOT MAKE OR ALTER ANY OPEN HOLES IN AN ENCLOSURE OF WIRING OR ELECTRICAL COMPONENTS DURING INSTALLATION.
10. DO NOT EXPOSE WIRING TO EDGE OF SHEET METAL OR OTHER SHARP OBJECTS IN ORDER TO PREVENT WIRING DAMAGE OR ABRASION.
11. THE LED LUMINAIRE MUST BE WIRED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES.
12. PROPER GROUNDING IS REQUIRED FOR SAFETY.
13. THIS LED LUMINAIRE MUST BE INSTALLED PER THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT. DO NOT ATTEMPT INSTALLATION IF THIS CONDITION IS NOT MET. CONTACT A QUALIFIED ELECTRICIAN.
14. DO NOT USE THIS LUMINAIRE FOR ANYTHING OTHER THAN ITS INTENDED USE.
15. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.

THIS LUMINAIRE IS SUITABLE FOR RECESSED GRID MOUNT ONLY.


## INSTALLATION

**WARNING:** To avoid fire, shock, or death; **TURN OFF POWER** at circuit breaker or fuse and test that power is off before wiring!


1. Pull out T-Bar clips on both sides of ends shown below.

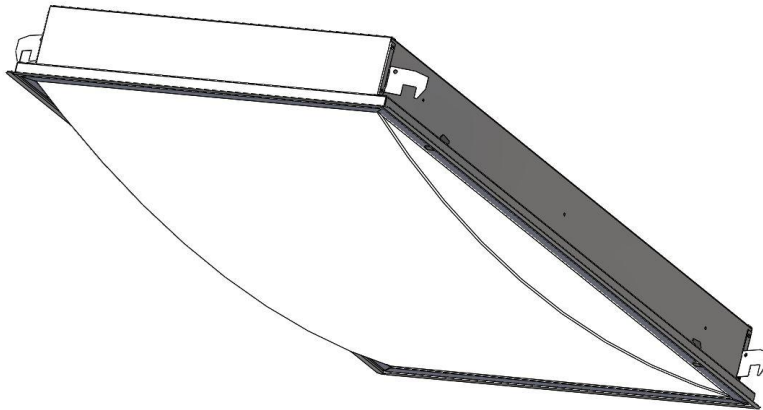

2. Install into T-Grid.

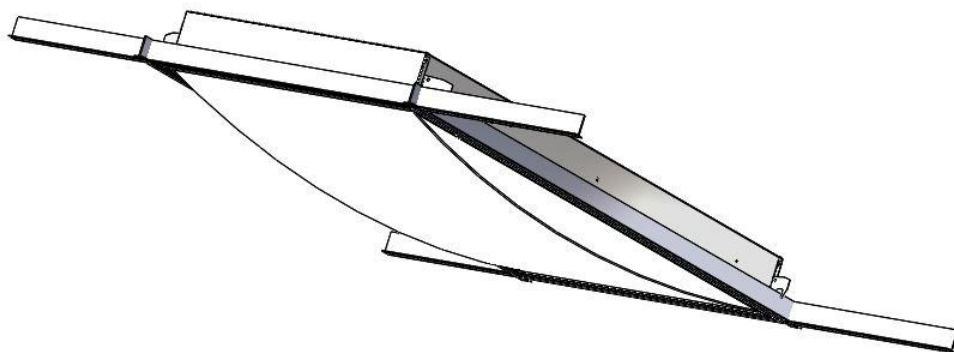


3. Remove electrical access plate on back of fixture and remove KO to install supply wires.

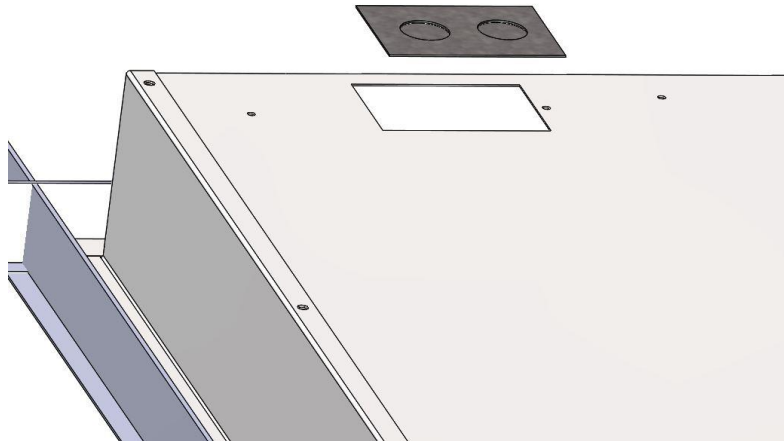

4. Connect wires as shown in wiring diagram.  
Universal driver: 120VAC - 277VAC, 50/60HZ.

### Wiring Diagram

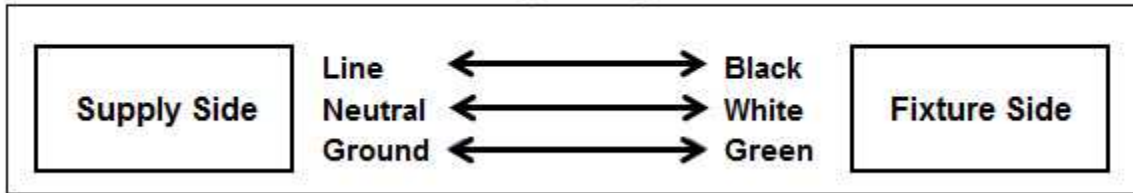

5. Re-install access plate and energize power.

Rev. 1 06/25/2020